

Lecture II: Persistent Memory Databases

CREATING THE NEXT®

Recap

Disk-oriented vs In-Memory DBMSs

Persistent Memory DBMSs

Storage Engine Architectures

Write-Behind Logging

Conclusion





Larger-than-Memory Databases

- Allow an in-memory DBMS to store/access data on disk <u>without</u> bringing back all the slow parts of a disk-oriented DBMS.
 - Minimize the changes that we make to the DBMS that are required to deal with disk-resident data.
 - ▶ It is better to have only the **buffer manager** deal with moving data around
 - ▶ Rest of the DBMS can assume that data is in DRAM.

Persistent Memory DBMSs

- Need to be aware of hardware access methods
 - ► In-memory Access = **Tuple**-Oriented.
 - ► Disk Access = **Block**-Oriented.



000

Today's Agenda

- Disk-oriented vs In-Memory DBMSs
- Persistent Memory DBMSs
- Storage Engine Architectures
- Write-Behind Logging



Disk-oriented vs In-Memory DBMSs

Dackground

- Much of the development history of DBMSs is about dealing with the limitations of hardware.
- Hardware was much different when the original DBMSs were designed in 1970s:
 - Uniprocessor (single-core CPU)
 - DRAM capacity was very limited.
 - ► The database had to be stored on disk.
 - Disks were even slower than they are now.



- But now DRAM capacities are large enough that most databases can fit in memory.
 - Structured data sets are smaller.
- We need to understand why we can't always use a "traditional" disk-oriented DBMS with a large cache to get the best performance.




- The primary storage location of the database is on non-volatile storage (*e.g.*, HDD, SSD).
- The database is organized as a set of fixed-length **pages** (aka blocks).
- The system uses an in-memory **buffer pool** to cache pages fetched from disk.
 - Its job is to manage the movement of those pages back and forth between disk and memory.




- When a query accesses a page, the DBMS checks to see if that page is already in memory:
 - ► If it's not, then the DBMS must retrieve it from disk and copy it into a <u>frame</u> in its buffer pool.
 - ► If there are no free frames, then find a page to evict.
 - ▶ If the page being evicted is dirty, then the DBMS must write it back to disk.
- Once the page is in memory, the DBMS translates any <u>on-disk addresses</u> to their in-memory addresses.




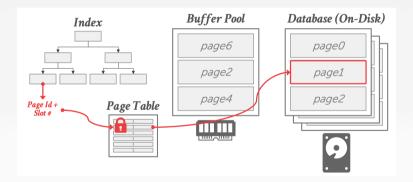




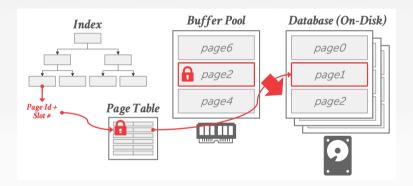




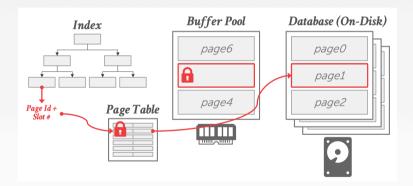



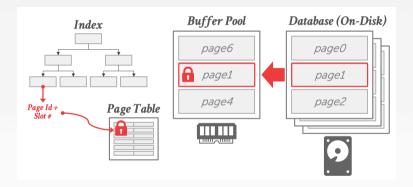



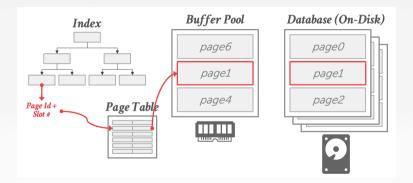




- Every tuple access goes through the buffer pool manager regardless of whether that data will always be in memory.
 - Always translate a tuple's record id to its memory location.
 - Worker thread must <u>pin</u> pages that it needs to make sure that they are not swapped to disk.



Disk-Oriented DBMS Overhead





- Assume that the primary storage location of the database is <u>permanently</u> in memory.
- Early ideas proposed in the 1980s but it is now feasible because DRAM prices are low and capacities are high.
- First commercial in-memory DBMSs were released in the 1990s.
 - Examples: TimesTen, DataBlitz, Altibase



	L3	DRAM	SSD	HDD
Read Latency	20 ns	60 ns	25,000 ns	10,000,000 ns
Write Latency	20 ns	60 ns	300,000 ns	10,000,000 ns


Reference



- An in-memory DBMS does **not** need to store the database in slotted pages but it will still organize tuples in pages:
 - ▶ **Direct memory pointers** vs. record ids
 - Fixed-length vs. variable-length data **memory pools**
 - ▶ Use checksums to detect software errors from trashing the database.
- The OS organizes memory in pages too. We already covered this.




In-Memory DBMS: Data Organization

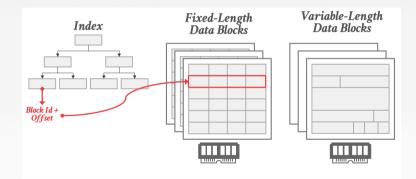



In-Memory DBMS: Data Organization

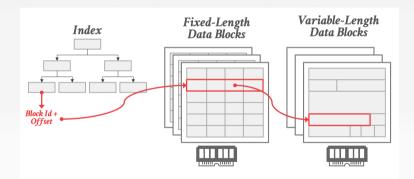



Persistent Memory DBMSs

Importance of Hardware

- People have been thinking about using hardware to accelerate DBMSs for decades.
- 1980s: Database Machines
- 2000s: FPGAs + Appliances
- 2010s: FPGAs + GPUs
- 2020s: PM + FPGAs + GPUs + CSAs + More! Reference



Persistent Memory

- Emerging storage technology that provide low latency read/writes like DRAM, but with persistent writes and large capacities like SSDs.
 - ▶ a.k.a., Non-Volatile Memory, Storage-class Memory
- First-generation devices were block-addressable
- Second-generation devices are byte-addressable




Persistent Memory

- Block-addressable Optane SSD
 - NVM Express works with PCI Express to transfer data to and from Optane SSDs
 - NVMe enables rapid storage in SSDs and is an improvement over older HDD-related interfaces (*e.g.*, Serial Attached SCSI (**SAS**) and Serial ATA (**SATA**))
- Byte-addressable Optane DIMMs
 - New assembly instructions and hardware support



Fundamental Elements of Circuits

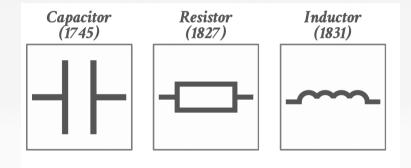




Fundamental Elements of Circuits

- In 1971, Leon Chua at Berkeley predicted the existence of a fourth fundamental element.
- A two-terminal device whose resistance depends on the voltage applied to it, but when that voltage is turned off it <u>permanently remembers</u> its last resistive state.
- Reference



Fundamental Elements of Circuits





Memristors

- A team at HP Labs led by Stanley Williams stumbled upon a nano-device that had weird properties that they could not understand.
- It wasn't until they found Chua's 1971 paper that they realized what they had invented.
- Reference
- Video



- Phase-Change Memory (PRAM)
- Resistive RAM (ReRAM)
- Magnetoresistive RAM (MRAM)



Phase-Change Memory

- Storage cell is comprised of two metal electrodes separated by a resistive heater and the phase change material (chalcogenide).
- The value of the cell is changed based on how the material is heated.
 - A short pulse changes the cell to a '0'.
 - A long, gradual pulse changes the cell to a '1'.
- Reference





Resistive RAM

- Two metal layers with two TiO2 layers in between.
- Running a current one direction moves electrons from the top TiO2 layer to the bottom, thereby changing the resistance.
- Potential programmable storage fabric...
 - Bertrand Russell's Material Implication Logic
- Reference





Magnetoresistive RAM

- Stores data using magnetic storage elements instead of electric charge or current flows.
- Spin-Transfer Torque (STT-MRAM) is the leading technology for this type of PM.
 - Supposedly able to scale to very smallsizes (10nm) and have <u>SRAM</u>-like latencies. What is SRAM used for?

Reference







Why This is for Real

- Industry has agreed to standard technologies and form factors (IDEC).
- Linux and Microsoft added support for PM in their kernels (DAX).
- Intel added new instructions for flushing cache lines to PM (CLFLUSH, CLWB).











- Block-addressable PM is not that interesting.
- Byte-addressable PM will be a game changer but will require some work to use correctly.
 - ► In-memory DBMSs will be better positioned to use byte-addressable PM.
 - Disk-oriented DBMSs will initially treat PM as just a faster SSD.




Storage & Recovery Methods

- Understand how a DBMS will behave on a system that only has byte-addressable PM.
- Develop PM-optimized implementations of standard DBMS architectures.
- Based on the N-Store prototype DBMS.
- Reference



- Existing programming models assume that any write to memory is non-volatile.
 - CPU decides when to move data from caches to DRAM.
- The DBMS needs a way to ensure that data is flushed from caches to PM.








- Cache-line Flush (CLFLUSH)
 - ▶ This instruction allows the DBMS to flush a cache-line out to memory.
 - If that cache line contains modified data at any level of the cache hierarchy, that data is written back to memory.
- Cache-line Write Back (CLWB)
 - Writes back the cache line (if modified) to memory
 - ► The cache line may be retained in the cache hierarchy in non-modified state
 - Improves performance by reducing cache misses
 - ▶ CLWB instruction is ordered only by store-fencing (SFENCE) operation.
- Asynchronous DRAM Refresh (ADR)
 - ► In case of a power loss, there is sufficient reserve power to flush the stores pending in the memory controller back to Optane DIMM.
 - ▶ Stores are posted to the Write Pending Queue (WPQ) in the memory controller





Naming

• If the DBMS process restarts, we need to make sure that all the pointers for in-memory data point to the same data.





• If the DBMS process restarts, we need to make sure that all the pointers for in-memory data point to the same data.







PM-Aware Memory Allocator

• Feature 1: Synchronization

- ► The allocator writes back CPU cache lines to PM using the CLFLUSH instruction.
- ▶ It then issues a SFENCE instruction to wait for the data to become durable on PM.

Feature 2: Naming

► The allocator ensures that virtual memory addresses assigned to a memory-mapped region never change even after the OS or DBMS restarts.




Storage Engine Architectures

Storage Engine Architectures


• Choice 1: In-place Updates

- ► Table heap with a write-ahead log + snapshots.
- Example: VoltDB
- Choice 2: Copy-on-Write
 - Create a shadow copy of the table when updated.
 - No write-ahead log.
 - Example: LMDB
- Choice 3: Log-structured
 - ► All writes are appended to log. No table heap.
 - Example: RocksDB




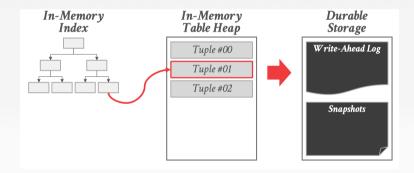




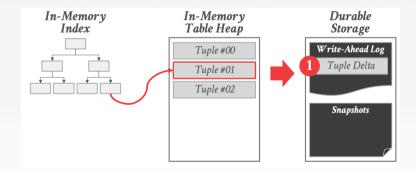



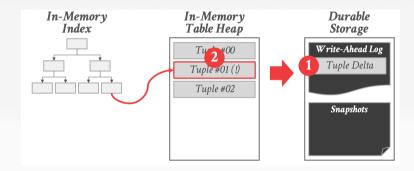



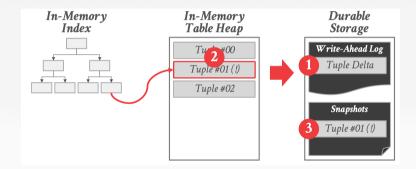



- Limitations
 - Duplicate Data
 - Recovery Latency




Persistent Memory DBMSs

PM-Aware Architectures

- Leverage the allocator's **non-volatile pointers** to only record **what** changed rather than **how** it changed.
- The DBMS only must maintain a transient **UNDO log** for a txn until it commits.
 - Dirty cache lines from an uncommitted txn can be flushed by hardware to the memory controller.
 - ▶ **No REDO log** because we flush all the changes to PM at the time of commit.




PM-Aware In-place Updates Engine

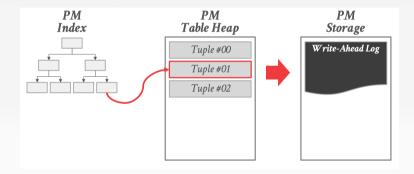




PM-Aware In-place Updates Engine

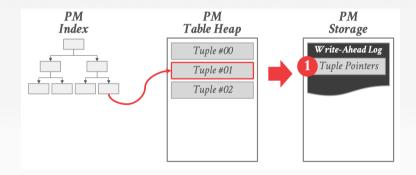





PM-Aware In-place Updates Engine

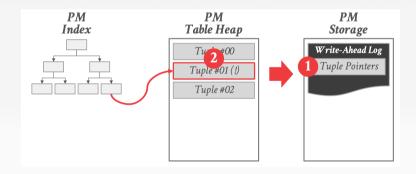




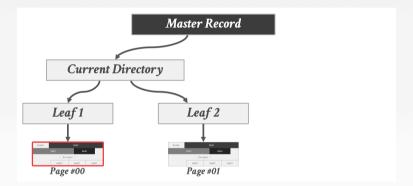




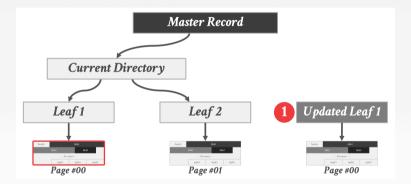



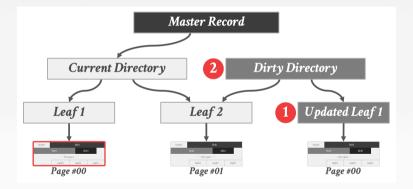



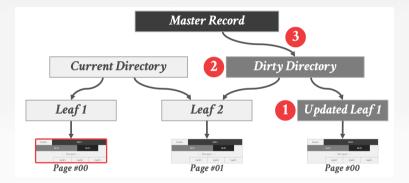




- Limitations
 - Expensive Copies




PM-Aware Copy-On-Write Engine

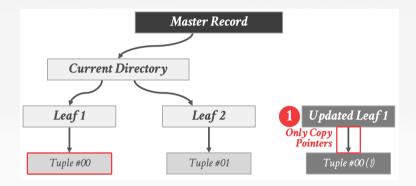





PM-Aware Copy-On-Write Engine

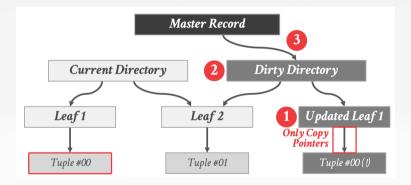







SSTable








SSTable





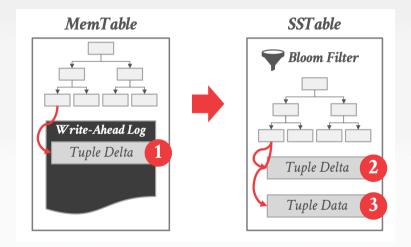




- Limitations
 - Duplicate Data
 - Compactions




PM-Aware Log-Structured Engine

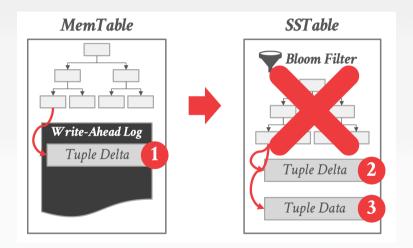



PM-Aware Log-Structured Engine

MemTable





Write-Behind Logging

Observation

- WAL serves two purposes
 - Transform random writes into sequential log writes.
 - Support transaction rollback.
 - Design makes sense for disks with slow random writes.
- But PM supports fast random writes
 - Directly write data to the multi-versioned database.
 - Only record <u>meta-data</u> about committed txns in log.



Write-Behind Logging


- PM-centric logging protocol that provides instant recovery and minimal duplication overhead.
 - Directly propagate changes to the database.

Persistent Memory DBMSs

- Only record meta-data in log.
- Reference
- Recover the database almost instantaneously.
 - Need to record meta-data about in-flight transactions.
 - ► In case of failure, ignore their effects.




Write-Behind Logging

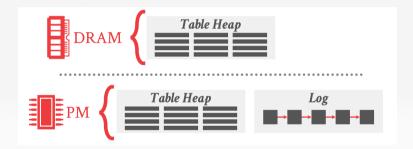



Write-Behind Logging

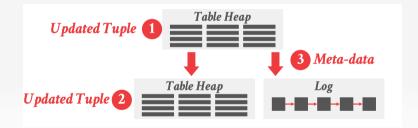



Write-Behind Logging

- DBMS assigns timestamps to transactions
 - Get timestamps within same group commit timestamp range to identify and ignore effects of in-flight txns.
- Use failed group commit timestamp range:
 - ▶ DBMS uses range during tuple visibility checks.
 - ▶ Ignores tuples created or updated within this range.
 - ▶ UNDO is implicitly done via visibility checks.



Write-Behind Logging

• Recovery consists of only analysis phase

Persistent Memory DBMSs


- ► The DBMS can immediately start processing transactions after restart with explicit UNDO/REDO phases.
- Garbage collection eventually kicks in to remove the physical versions of uncommitted transactions.
 - Using timestamp range information in write-behind log.
 - After this finishes, no need to do extra visibility checks.



Metadata for Instant Recovery


- Use group commit timestamp range to ignore effects of transactions in failed group commit.
 - Maintain list of failed timestamp ranges.



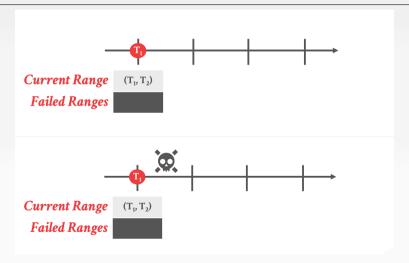




Metadata for Instant Recovery

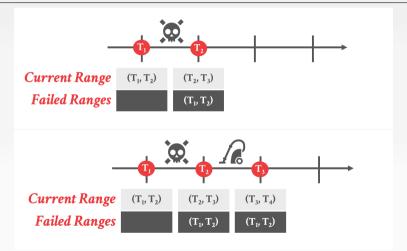




Metadata for Instant Recovery

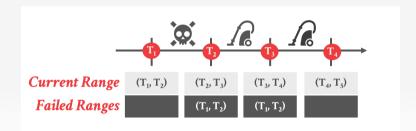




Write-Behind Logging – Recovery

- Replay Log with 1m TPC-C Transactions
- PM 2× Latency Relative to DRAM

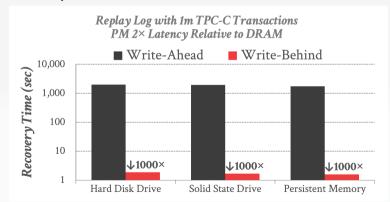



- TPC-C Transactions (Eight Warehouses)
- PM 2× Latency Relative to DRAM

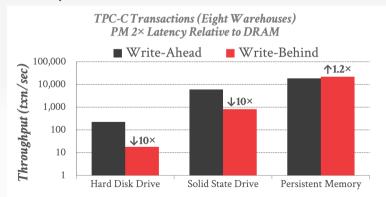





PM Summary

- Optimization of Storage Engine Architectures
 - ▶ Leverage byte-addressability to **avoid unnecessary data duplication**.
- Optimization of Logging and Recovery Protocol
 - ► PM-optimized recovery protocols avoid the overhead of processing a log.
 - ▶ Non-volatile data structures ensure consistency.



Parting Thoughts

- The design of a in-memory DBMS is significantly different than a disk-oriented system.
- The world has finally become comfortable with in-memory data storage and processing.
- Byte-addressable PM is going to be a game changer.
- We are likely to see many new computational components that DBMSs can use in the next decade.
 - ► The core ideas / algorithms will still be the same.



Next Class

Concurrency Control

